

Technical Information

20-35/95 | 2K Primerfiller



A brand of
BASF - We create chemistry

Process for primerfiller


- High solids containing primer filler for wet on wet application
- Repairs with larger bare metal areas should prior be treated with 27-10 2K Wash primer



1. Mixing of filler for correct undercoat solution

(can be mixed with each other as shown in the mixing table)

Undercoat solution / Mixing ratio % by vol.	20 – 35 White	20 – 95 Black
White	100 %	
Light grey	95 %	5 %
Grey	80 %	20 %
Dark grey	50 %	50 %
Black		100%

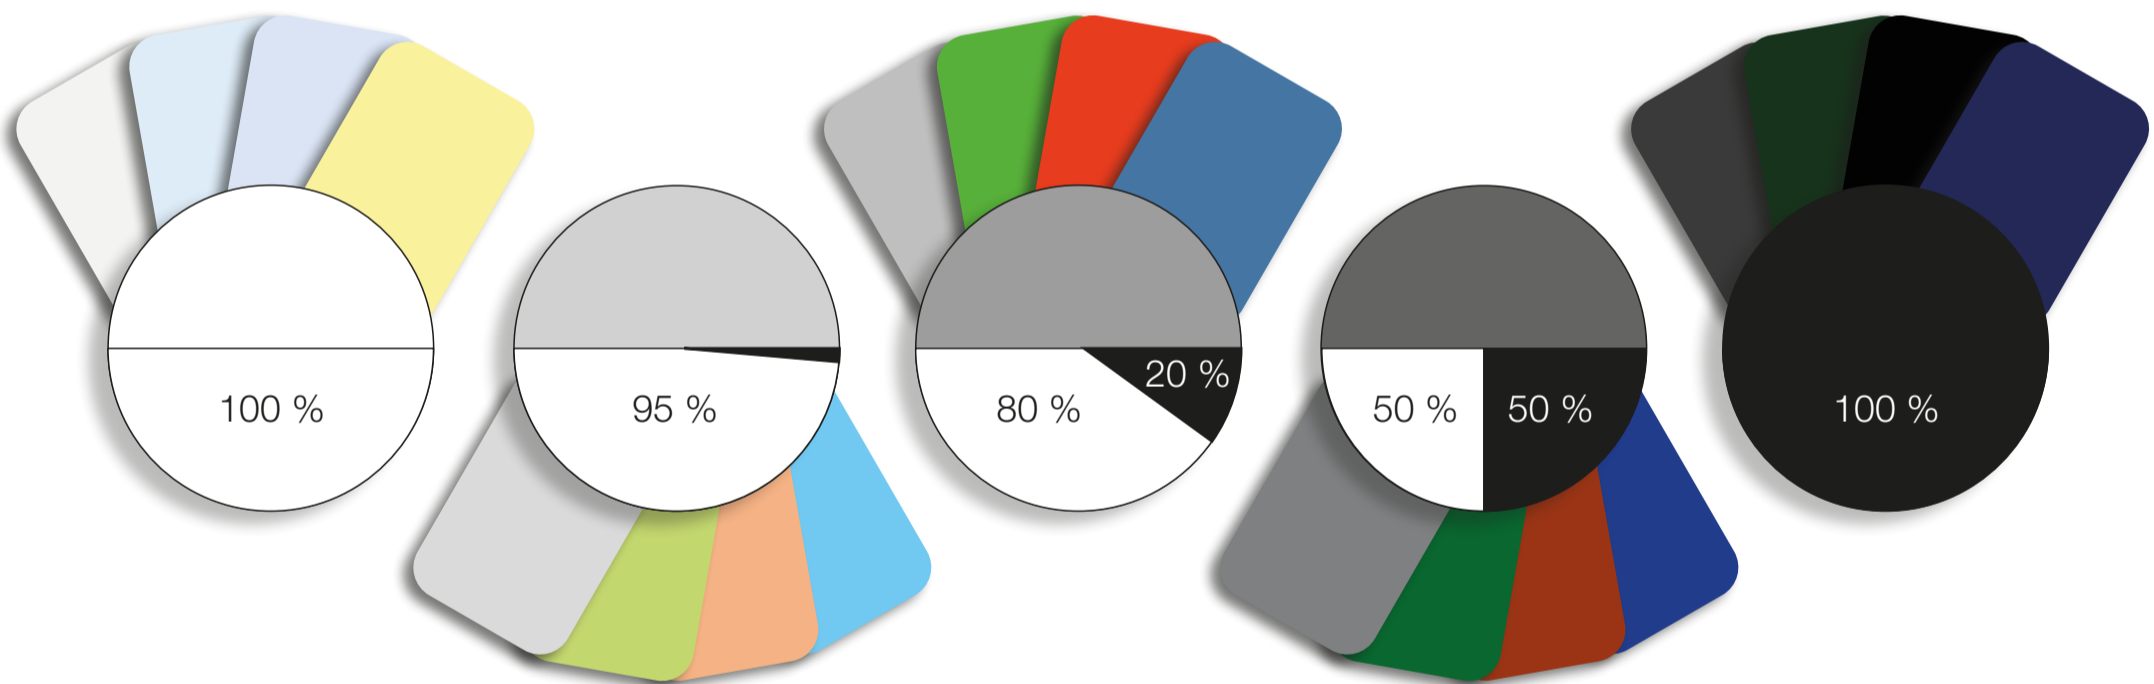

2. Temperature Chart for baslac primer filler

		Mixing Ratio				
More than one panel	Primer filler	3	20 – 35/95			
	Hardener	1	50 – 20	50 – 20	50 – 20	50 – 20
	Reducer	1	60 – 20	60 – 20	60 – 20	60 – 30
Up to one panel	Primer filler	3	20 – 35/95			
	Hardener	1	50 – 15	50 – 15	50 – 20	50 – 20
	Reducer	1	60 – 20	60 – 20	60 – 20	60 – 20

