

# Technical Information

## 20-35/95 | 2K Primerfiller



A brand of  
BASF - We create chemistry

### Process for primerfiller


- High solids containing primer filler, for wet-on-wet application

### 1. Mixing of filler for correct undercoat solution

(can be mixed with each other as shown in the mixing table)



Undercoat solution / Mixing ratio % by vol.	20 – 35 White	20 – 95 Black
White	100 %	
Light grey	95 %	5 %
Grey	80 %	20 %
Dark grey	50 %	50 %
Black		100%

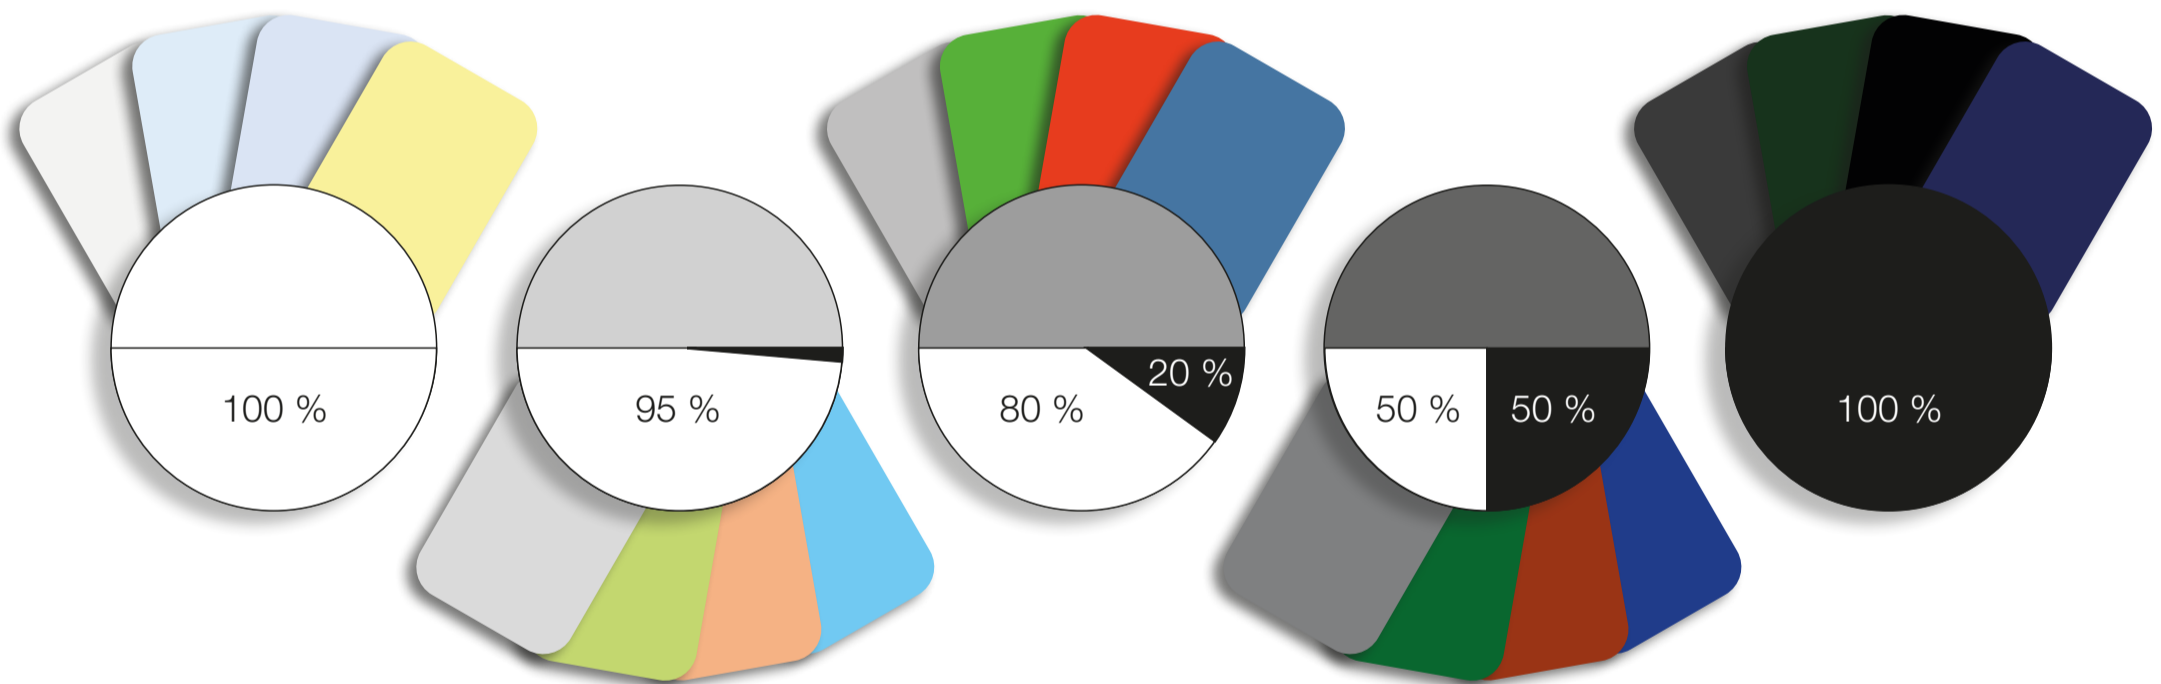

### 2. Temperature Chart for baslac primer filler

		Mixing Ratio			
More than one panel	Primer filler	3	20 – 35/95		
	Hardener	1	50–20	50–20	50–20
	Reducer	1	60–20	60–20	60–30
Up to one panel	Primer filler	3	20 – 35/95		
	Hardener	1	50–15	50–15	50–20
	Reducer	1	60–20	60–20	60–20