

Technical Information

20-24/34/94 | 2K Primerfiller



A brand of
BASF - We create chemistry

Process for primerfiller


- High solids containing primer filler, fast drying and easy sandability
- Repairs with larger bare metal areas should prior be treated with 27-10 2K Wash primer



1. Mixing of filler for correct undercoat solution

(can be mixed with each other as shown in the mixing table)

Undercoat solution / Mixing ratio % by vol.	20 – 34 White	20 – 24 Grey	20 – 94 Black
White	100 %		
Light grey	50 %	50 %	
Grey		100 %	
Dark grey		50 %	50 %
Black			100 %

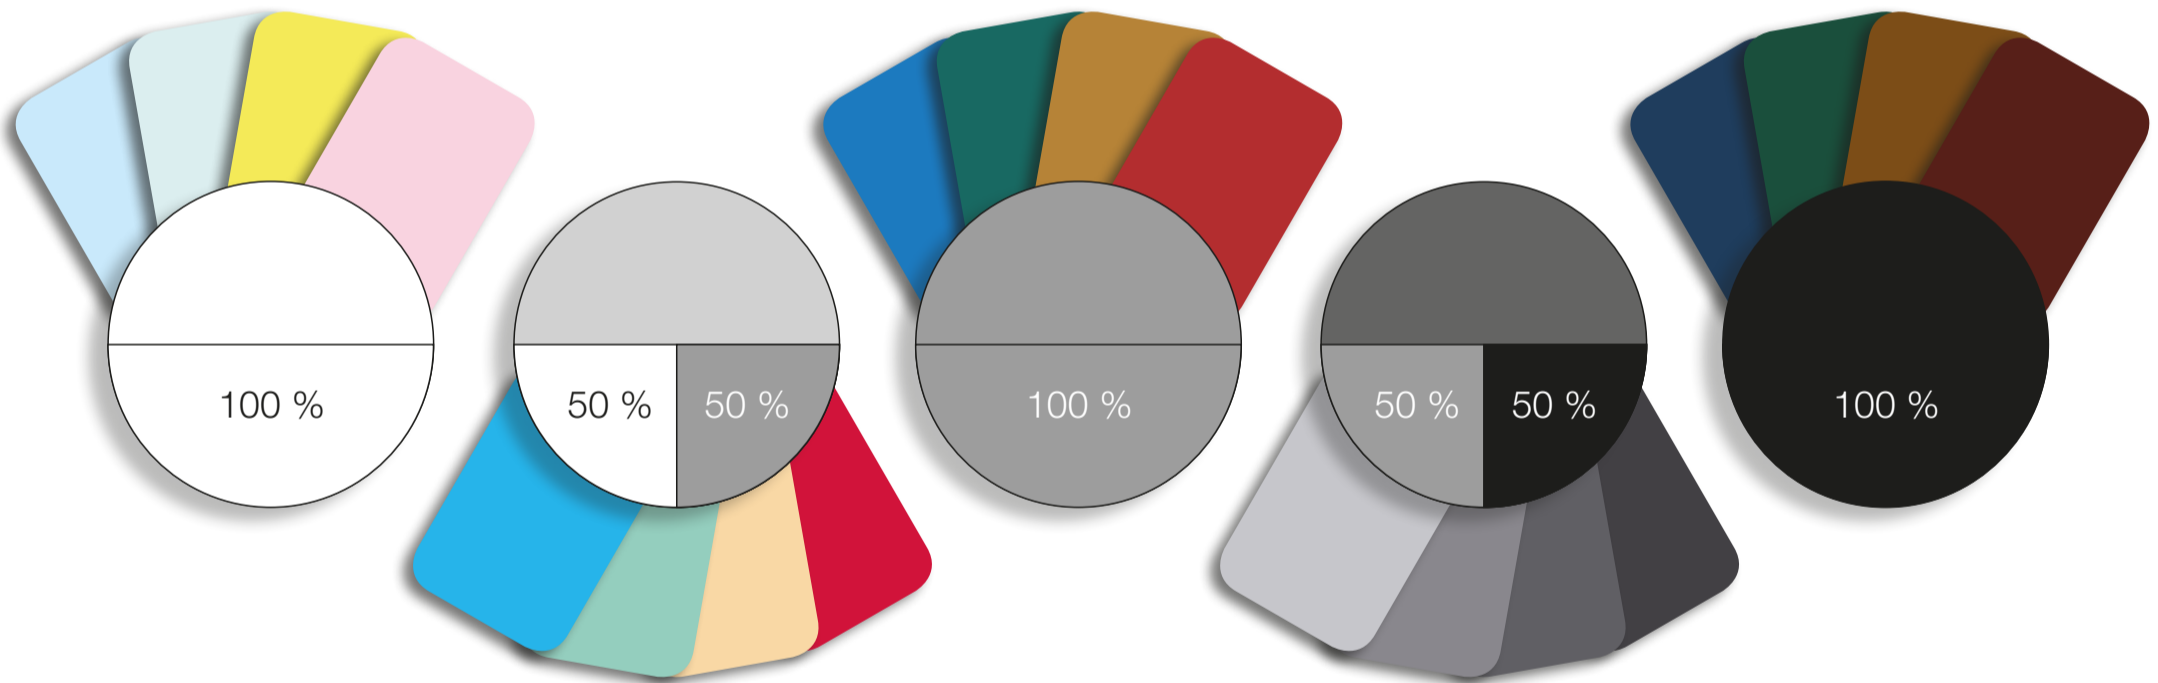

2. Temperature Chart for baslac primer filler

		Mixing Ratio				
More than one panel	Primer filler	4	20-24/34/94			
	Hardener	1	50-15	50-15	50-15	50-15
	Reducer	1	60-10	60-20	60-20	60-20
Up to one panel	Primer filler	4	20-24/34/94			
	Hardener	1	50-10	50-15	50-15	50-15
	Reducer	1	60-05/10	60-10	60-10	60-20
Spot repair	Primer filler	4	20-24/34/94			
	Hardener	1	50-10			
	Reducer	1	60-05/10			



More information on
www.baslac.com

